


# SDLANCH INTELLIGENT CO LTD

Phone:0537-3162017

E-mail:info@ sdlanch.com

Website:www.sdlanch.com

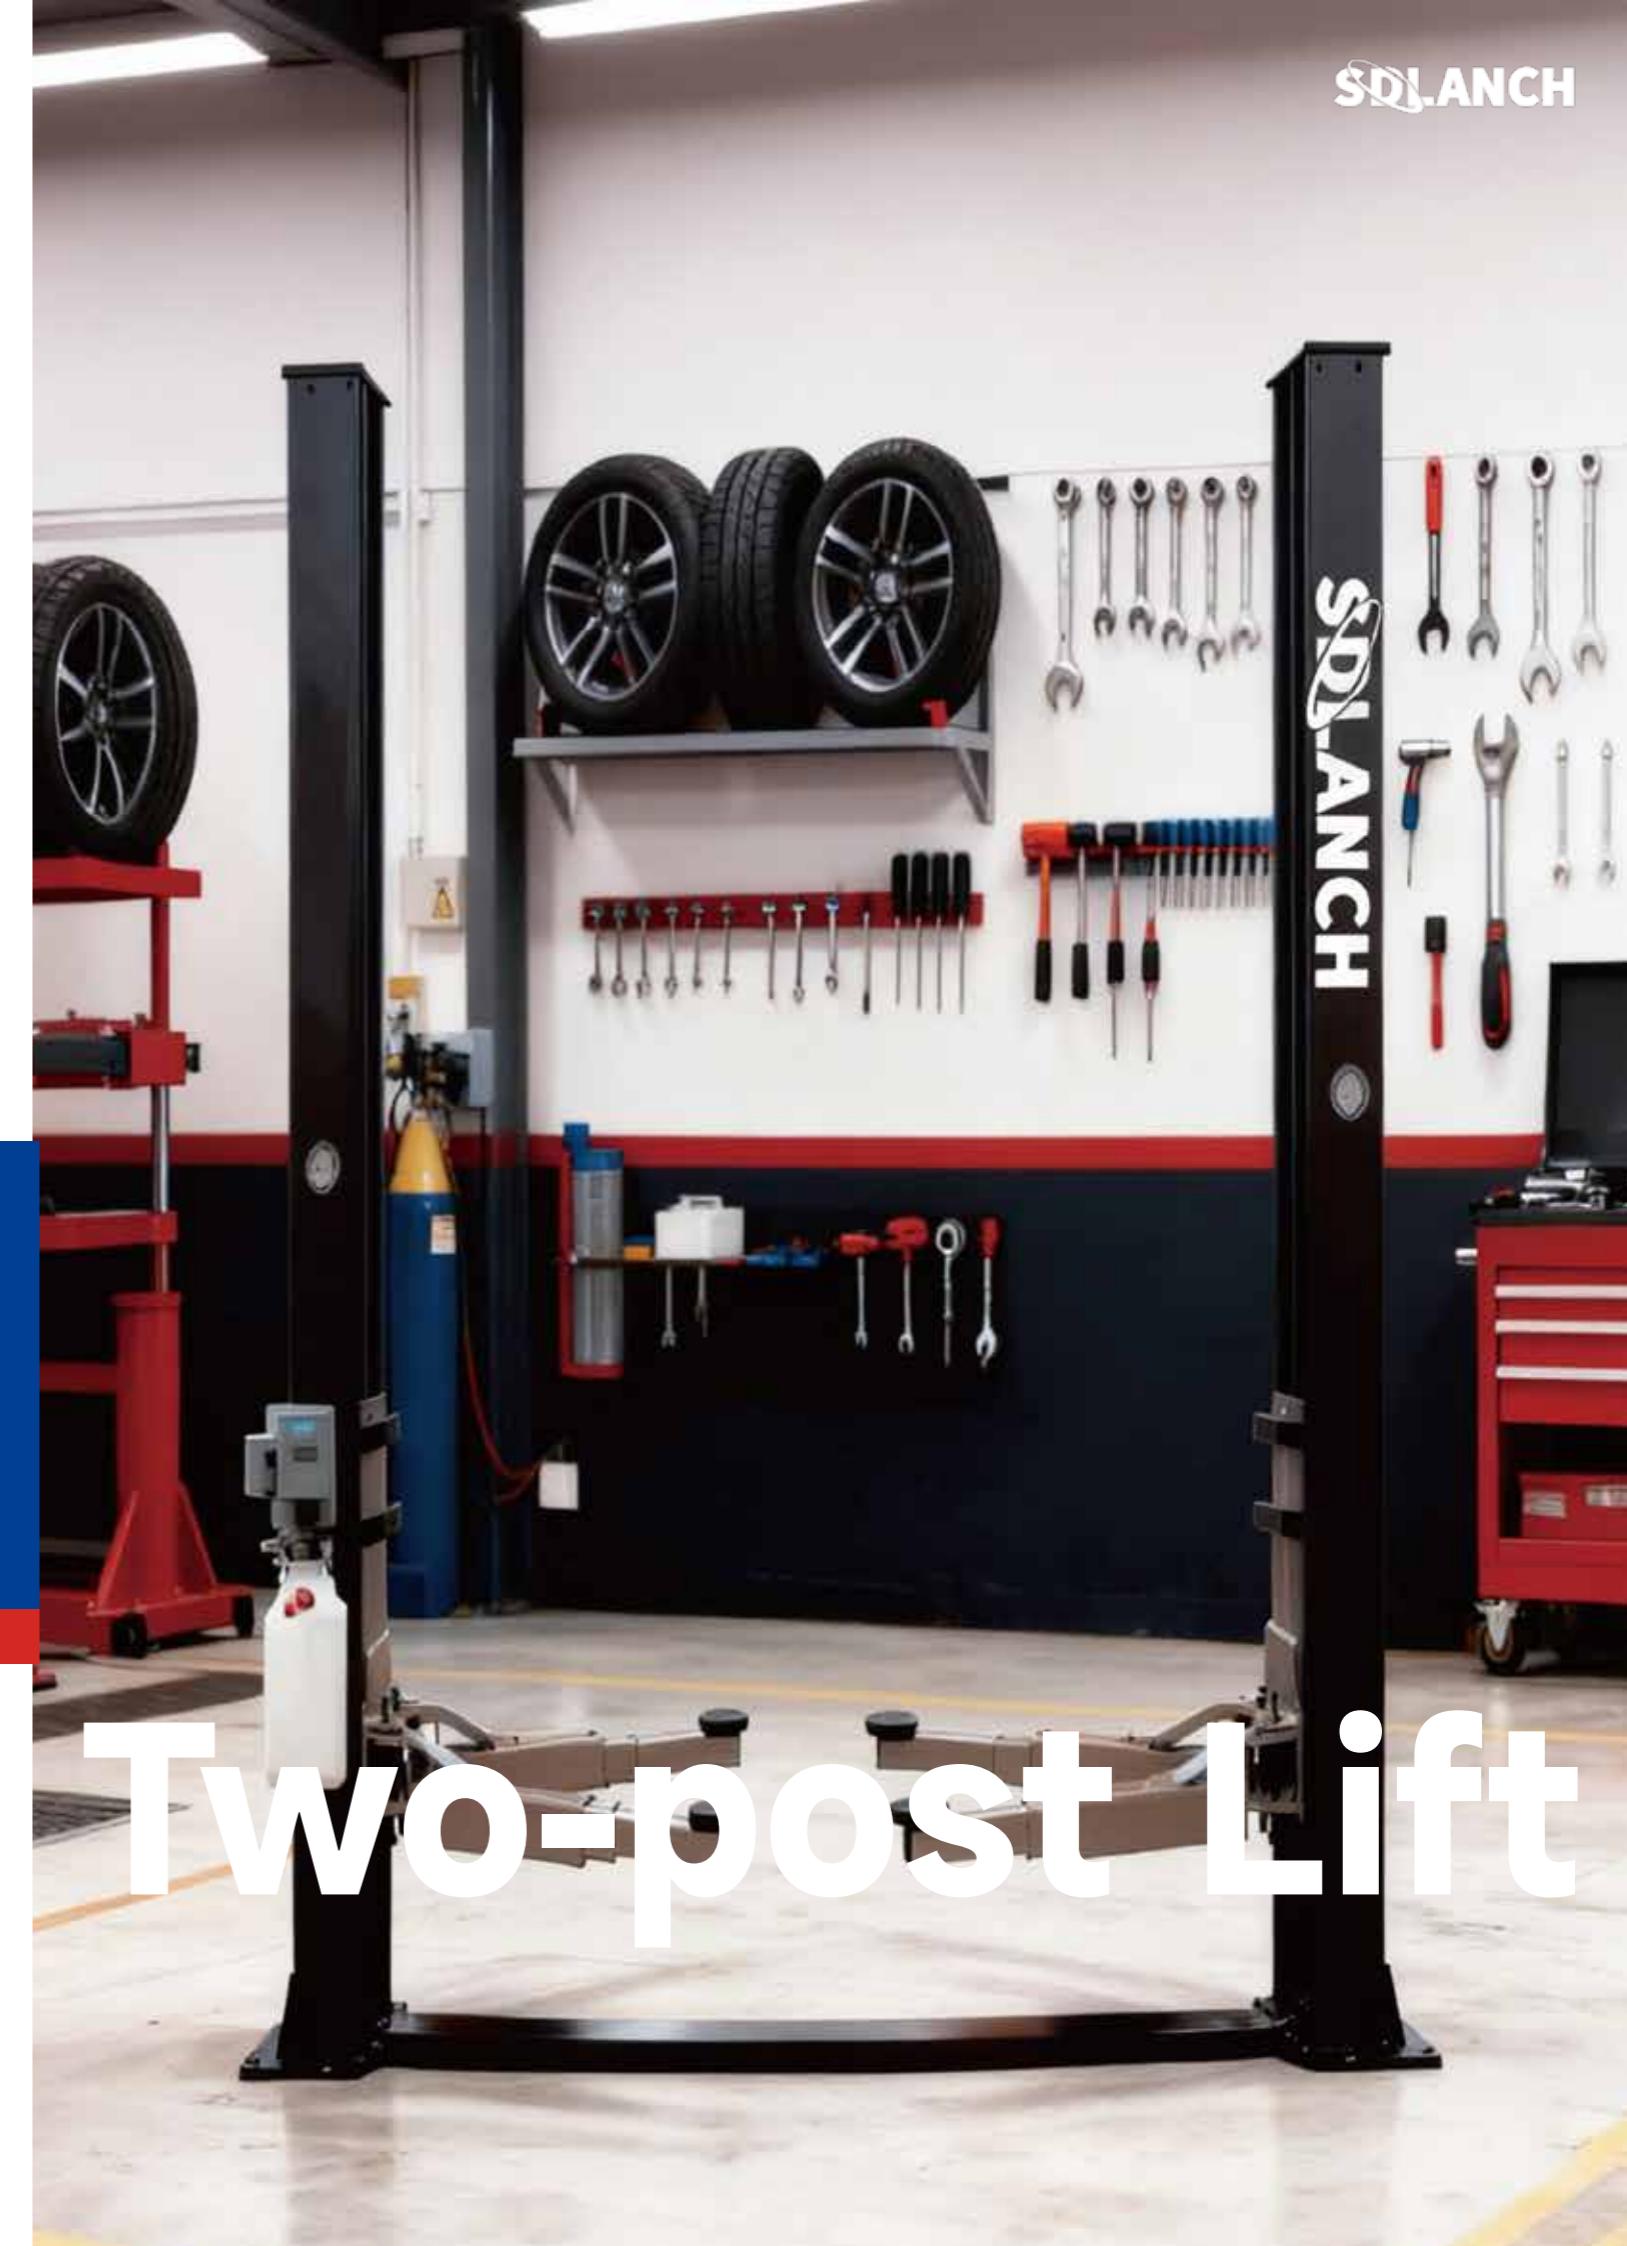

# Two-post lift

# COMPANY PROFILE

## SDLANCH INTELLIGENT CO., LTD

Since 2016 and is located on the first floor of an office building in Huangtun Street, Guangan Road, High-tech Zone, Jining City, Shandong Province. It is a high-tech innovative enterprise integrating research and development, production and sales. Up to now, it has set up offices and regional overseas warehouses in the United States, Russia, the United Kingdom, Spain, Australia, South Korea, Saudi Arabia and other places.

The total area of the factory is 105,000 square meters. It has 2 R&D centers, 3 independent factories, 9 standard workshops, and 700 employees with degrees ranging from PhDs to Masters and Bachelors. Among them, there are 100+ senior technicians, 30+ R&D engineers, and 20+ senior engineers. The company holds the "ISO:9001 Quality Management System Certification" and international authoritative third-party certifications such as the US EPA, EU CE, Euro-V, and SGS. The company has over 1,000 SKUs and its products are exported to 170 countries and regions.

## CONTENTS

Product Introduction	01
SDLDCL3000 Two-post Lift	03
SDLDCL4000 Two-post Lift	04
SDLDCL4500 Two-post Lift	05
SDLDCL5000 Two-post Lift	06

# DOUBLE COLUMN LIFT

In the field of automotive maintenance and repair, the two-post lift serves as the core equipment for achieving vertical lifting of vehicles. With its stable support performance, flexible working space, and wide vehicle compatibility, it has become an essential tool for automotive 4S shops, comprehensive repair shops, and car beauty salons. Whether for routine maintenance (such as oil changes, chassis checks), fault repairs (such as transmission repairs, suspension replacements), or body inspections, the two-post lift can easily lift vehicles to the appropriate height, providing repair personnel with a safe and convenient working environment, effectively addressing the pain points of limited space and low efficiency associated with traditional pit repairs.



## PRODUCT FEATURES

01

### DOUBLE-COLUMN STRUCTURE:

Using two symmetrically distributed columns as the core support, manufactured by integrated forming and welding process.

02

### THE BASE IS FIXED TO THE GROUND:

The base of the column is equipped with a widened and thickened base to enhance the stability of the entire machine.

03

### ELEVATOR SYSTEM:

Stable and efficient, precise control.

04

### SUPPORT AND LOCK:

Adopts a dual safety protection design of 'mechanical locking and hydraulic locking'.

05

### ADAPT TO MULTIPLE TYPES OF REPAIRS:

Adopting a "dual-column symmetrical layout", there are no obstructions underneath the chassis after the vehicle is lifted.




## SLDCL3000

### Manual bilateral unlocking double-column lift

- Base plate two post lift with two side manual lock release.
- Aluminum motor and steeloil tank is an optional.

#### TECHNICAL PARAMETERS

SLDCL3000		
Lifting capacity	3000	(kg)
Lifting Height	1800	(mm)
Lifting Time	45-55	(s)
Total Height	2700	(mm)
Total width	3300	(mm)
Width between pillars	2740	(mm)
Power Supply	220/380	(V)
Net Weight	460	(kg)
Packing size	2840*440*710(Column) 320*260*810(Pump station)	(mm)

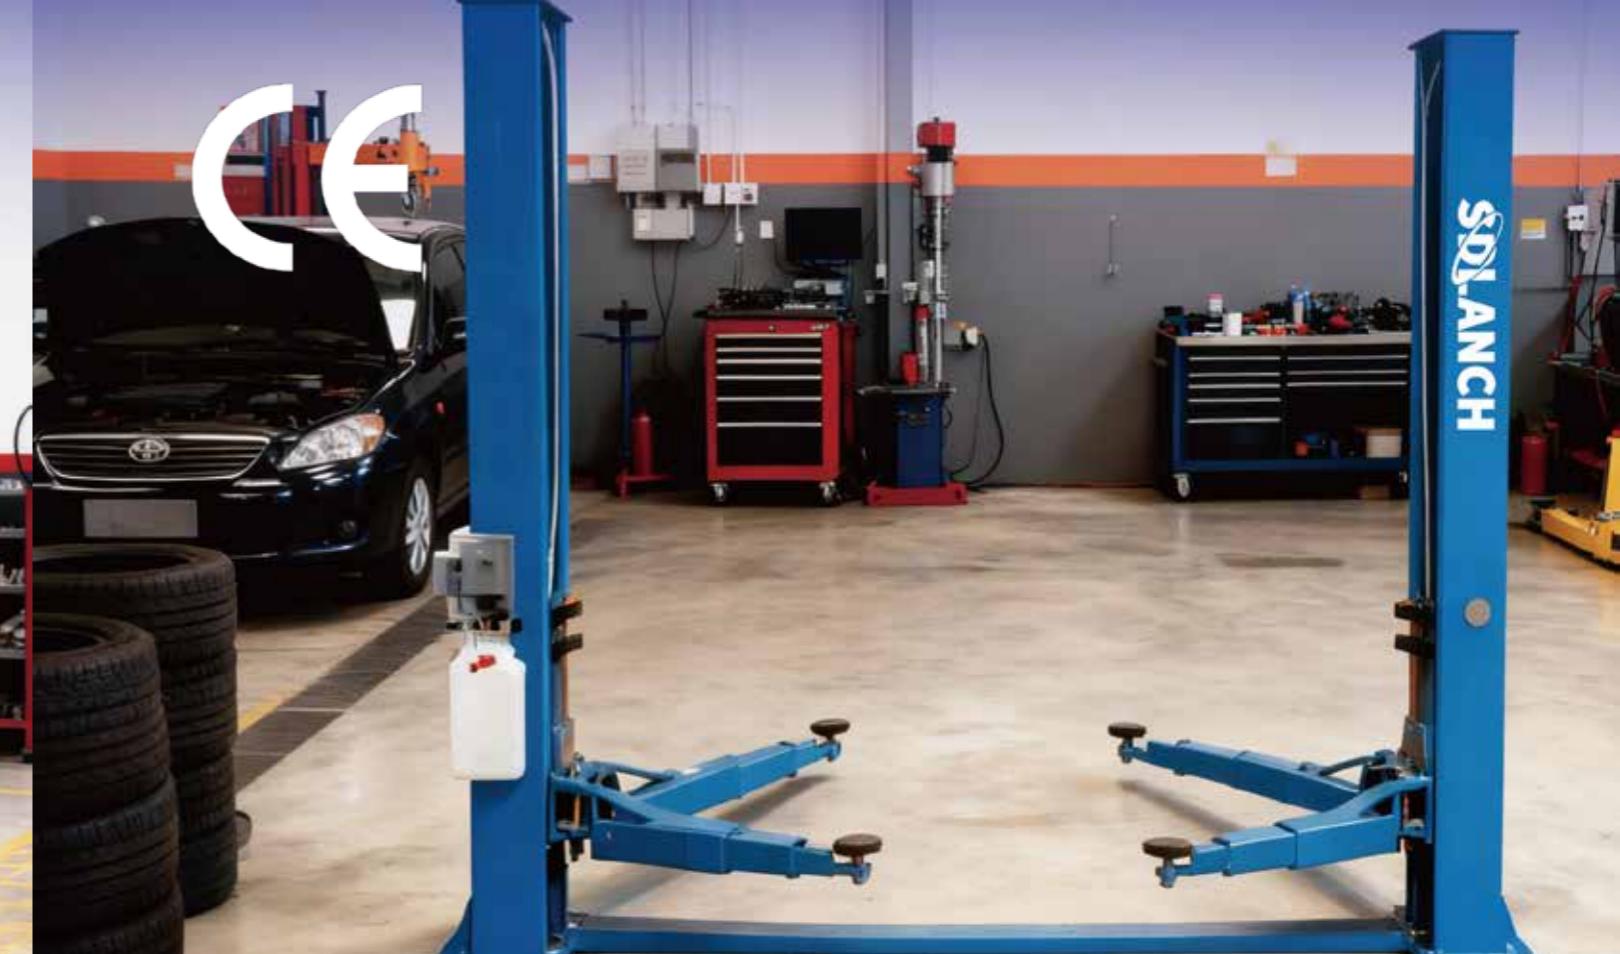


## SLDCL4000

### Manual bilateral unlocking double-column lift

- Suitable for service SUV.
- Aluminum motor and steeloil tank is an optional.
- Precision locking gear design.

#### TECHNICAL PARAMETERS

SLDCL4000		
Lifting capacity	4000	(kg)
Lifting Height	1800	(mm)
Lifting Time	45-55	(s)
Total Height	2700	(mm)
Total width	3300	(mm)
Width between pillars	2740	(mm)
Power Supply	220/380	(V)
Net Weight	510	(kg)
Packing size	2840*440*710(Column) 320*260*810(Pump station)	(mm)

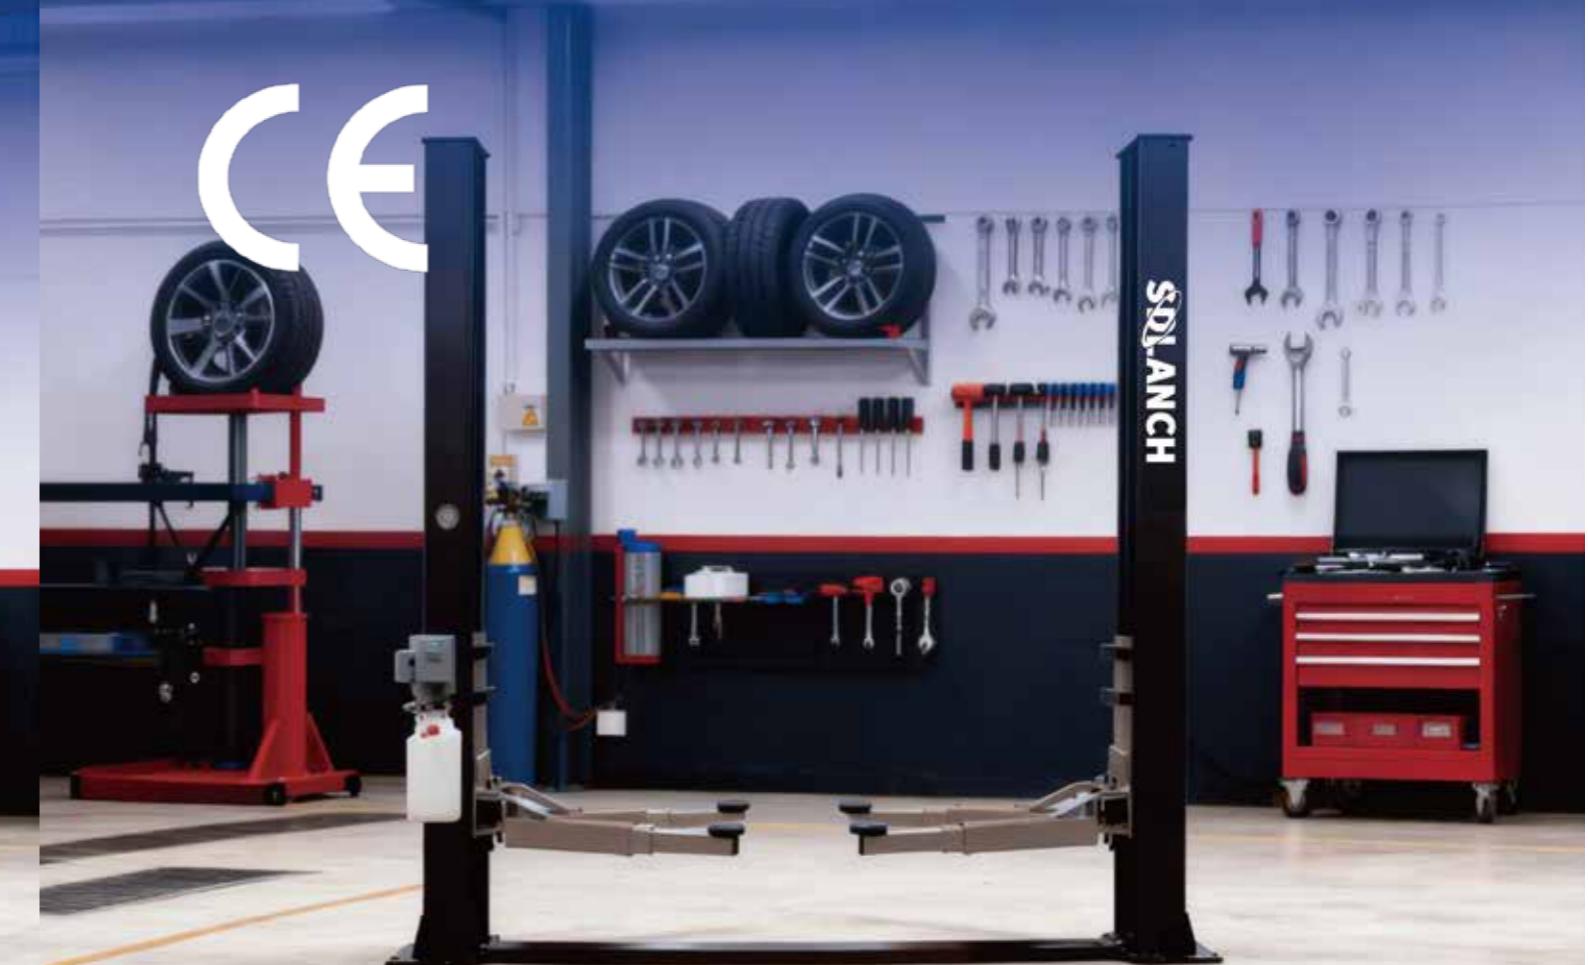

## SDLCL4500

### Manual bilateral unlocking double-column lift

- Suitable for service SUV.
- Precision locking gear design.
- Aluminum motor and steeloil tank is an optional.

#### TECHNICAL PARAMETERS

SDLCL4500		
Lifting capacity	4500	(kg)
Lifting Height	1800	(mm)
Lifting Time	45-55	(s)
Total Height	2700	(mm)
Total width	3300	(mm)
Width between pillars	2740	(mm)
Power Supply	220/380	(V)
Net Weight	535	(kg)
Packing size	2840*440*710(Column) 320*260*810(Pump station)	(mm) (mm)

## SDLCL5000

### Manual bilateral unlocking double-column lift

- Suitable for service SUV, Precision locking gear design.
- Aluminum motor and steeloil tank is an optional.
- Extra thick cables, Extra wide chain.

#### TECHNICAL PARAMETERS

SDLCL5000		
Lifting capacity	5000	(kg)
Lifting Height	1800	(mm)
Lifting Time	45-55	(s)
Total Height	2700	(mm)
Total width	3440	(mm)
Width between pillars	2880	(mm)
Power Supply	220/380	(V)
Net Weight	560	(kg)
Packing size	2840*440*710(Column) 320*260*810(Pump station)	(mm) (mm)